



IN-8017

IN-2423 / IN-2429

XTIRPA™

Fall Protection Tripod (IN-2423 7 ft - 2134 mm / IN-2429 9 ft - 2743 mm)

SPECIFICATIONS


- Adjustable tripod height
- Integrated pulley
- Anchoring ring for 2nd pulley included
- Foot safety strap included
- Up to 3 simultaneous retrieval systems
- Compact and easy to assemble
- Lightweight

CERTIFICATIONS


ANSI Z359.18 TYPE D
AS/NZS 5532 FREEFALL
CSA Z259.15 CLASS AD

OSHA 1910.140 / 1926.502
EN 795 (2012), TS 16415 (2013)


- Type: **B**
- Max number of **users**: up to 3

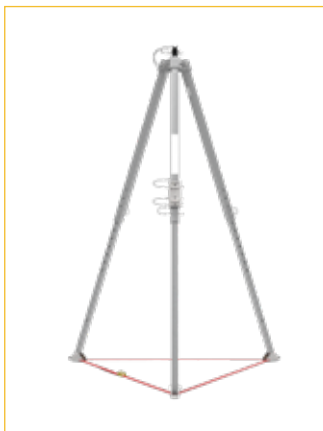

Engineered for maximum strength while remaining lightweight and easy to transport.

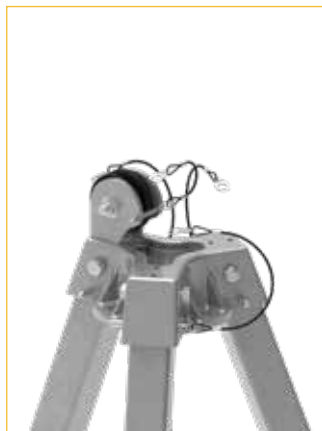

Guides the SRL or winch cable for smooth and reliable operation.

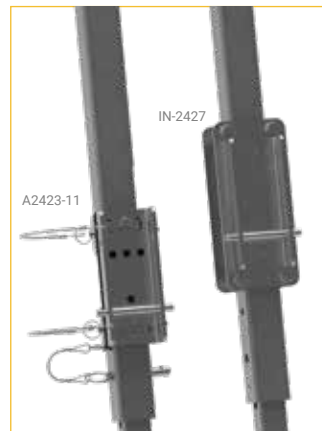

Provides a secure attachment for SRLs and winch (EN standard A2423-11) / (ANSI, AS/NZS, CSA and OSHA IN-2427).



Ensures stable support on ground surfaces.

TECH SPECS

IN-2423

Total Height: **7 ft (2134 mm)**
Working Height Range:
57" (1455 mm) to 96" (2444 mm)
Leg Span: **43" (1101 mm) to 64" (1614 mm)**
Total Weight: **52.3 lb (23.7 kg)**
Working Load Limit (WLL): **360 lb (164 kg)**

IN-2429

Total Height: **9 ft (2743 mm)**
Working Height Range:
98" (2486 mm) to 113" (2875 mm)
Leg Span: **68" (1725 mm) to 79" (1998 mm)**
Total Weight: **63.9 lb (29 kg)**
Working Load Limit (WLL): **360 lb (164 kg)**



IN-8017

IN-2423 / IN-2429

XTIRPA™

Fall Protection Tripod (IN-2423 7 ft - 2134 mm / IN-2429 9 ft - 2743 mm)

KEY FEATURES

Lightweight aluminum structure

Easily handled by one person, with a total weight of only IN-2423 52.3 lb (23.7 kg) and IN-2429 63.9 lb (29kg).

Designed for vertical access

Perfect for vertical entry provides multiple anchor points for rescue and fall arrest systems.

Exceptional strength rating

Certified to ANSI, OSHA, and EN 795 standards with resistance up to 22.2 kN.

Fast, tool-free setup

Quick and intuitive deployment on flat surfaces with simple locking pins.

Xtirpa™ modular compatibility

Works seamlessly with standard winches and SRLs.

EASE OF INSTALLATION


The IN-2423 and IN-2429 tripods are built for **quick deployment on any flat surface** without the need for specialized tools.

Their **telescopic legs** adjust easily to match uneven ground or site configurations, and safety pins ensure secure locking during setup.

Designed for **single-user assembly**, this system is ideal for rapid intervention or mobile job sites where time and flexibility are critical.

TECHNICAL DATA

IN-2423

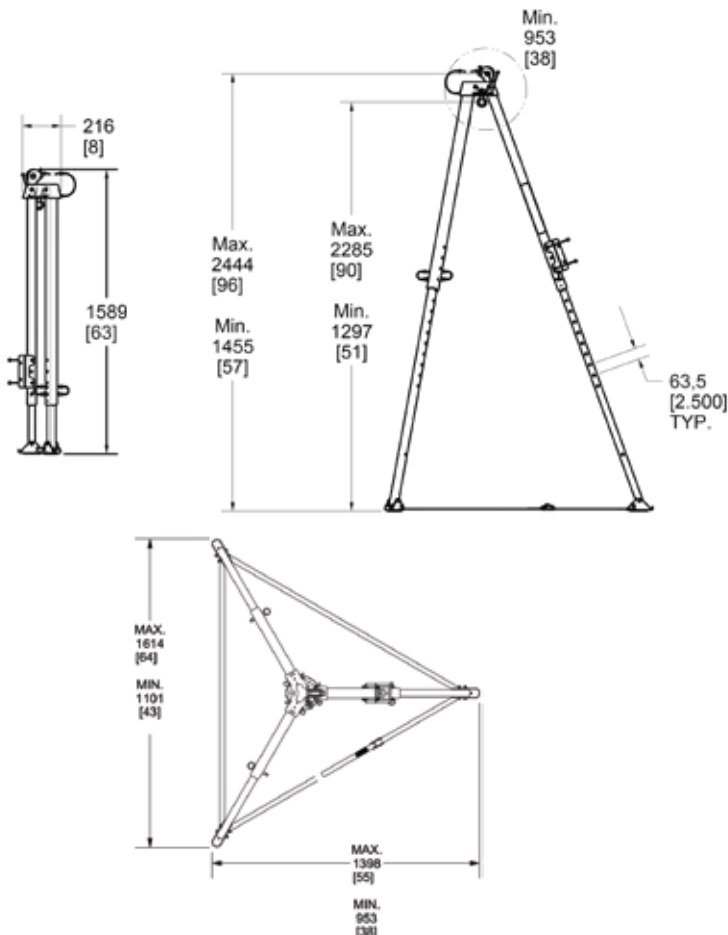

IN-2429

