



IN-8004

XTIRPA™

24" / 610 mm Davit Arm with H base

SPECIFICATIONS

- Mobile H-base for confined space access
- Adjustable height and working reach
- Certified for 2 users 164 kg (360 lb)
- Fall-protection anchor point rated to 22 kN
- Compatible with multi-brand winches and SRLs
- Fast, tool-free installation
- Wheeled system for easy repositioning



REGULATIONS

ANSI Z359.18 TYPE D
CSA Z259.15 CLASS AD

OSHA 1910.140 / 1926.502
EN 795 (2012), TS 16415 (2013)

- Type: **B**
- Max number of **users**: up to 2



Ensures smooth and reliable cable operation.



Multi-bracket for SRLs or winch.



Fall-protection anchor point rated to 22 kN.



Fits different opening widths for greater stability.



Adjustable feet ensure stability on uneven surface.






IN-8004

XTIRPA™

24" / 610 mm Davit Arm with H base

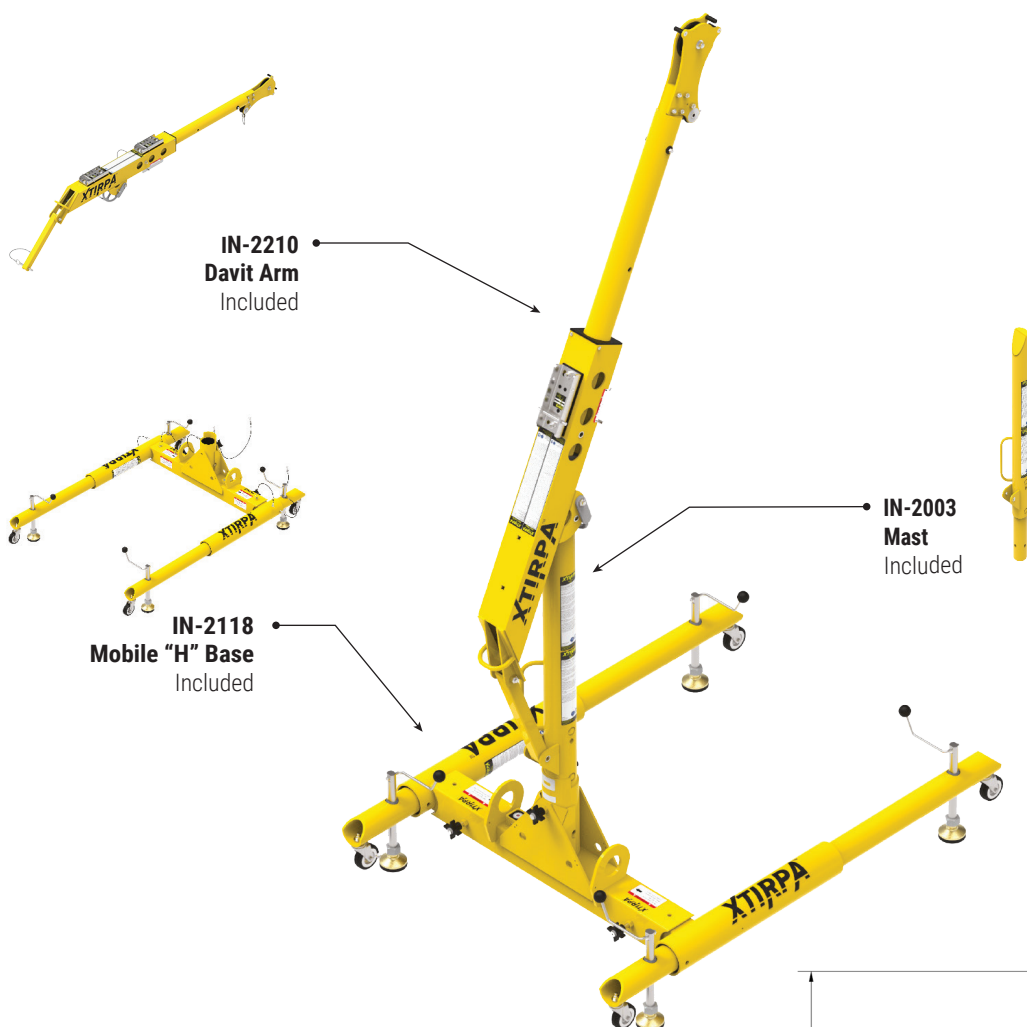

TECHNICAL DATA

