



IN-8005

XTIRPA™

Davit Arm 48" (1200 mm)

SPECIFICATIONS


- Telescopic reach adjustable from 30" - 48" / 762 - 1,219 mm
- 3 mast heights available for increased flexibility
- Optional bracket for second SRL or winch
- Aeronautical aluminum build, stronger and lightweight
- Extra fall-protection anchor point rated to 22 kN
- Multiple adapters available
- Tool-free assembly with safety pins

REGULATIONS

ANSI Z359.18 TYPE D
AS / NZS 5532 FREEFALL
CSA Z259.15 CLASS AD

OSHA 1910.140 / 1926.502
EN 795 (2012), TS 16415 (2013)

- Type: **A**
- Max number of **users**: up to 3

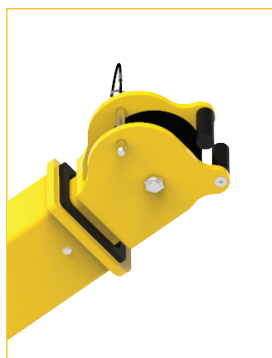

Easy cable positioning.



Bracket for SRL or winch included.



Fall-protection anchor point rated to 22 kN.



Mast fitted with transport handle.



Floor adapter with 360° maneuverability.





IN-8005

XTIRPA™

Davit Arm 48" (1200 mm)

