



IN-8025

XTIRPA™

X-TRAK-R Pole Hoist Multi Angle Head System

SPECIFICATIONS

- 360° swiveling head with adjustable working angle
- Reach up to 122.8 in / 3120 mm with optional extensions
- Lightweight anodized aluminum construction (21.25 lb / 9.64 kg)
- Adjustable SRL or winch mounting bracket
- T-stabilizer angle adjustment +/- 30°
- Push-button height adjustment with 10 positions
- Multiple restraint anchor points for enhanced stability and safety



REGULATIONS


ANSI Z359.18 TYPE D
AS / NZS 5532 FREEFALL
CSA Z259.15 CLASS AD

OSHA 1910.140 / 1926.502
EN 795 (2012), TS 16415 (2013)

- Type: **A**
- Max number of **users**: up to 1



Adjustable mast and stabilizer mounting bracket.

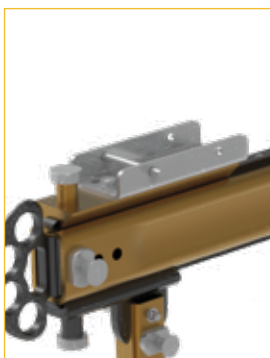


Adjustable bracket for SRL or winch.



+/- 30° Stabilizer adjustable bracket.



Rear anchor/tie-off handle.

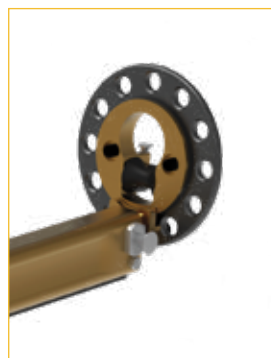

360° adjustable head with anchor/tie-off points.





IN-8025

XTIRPA™

X-TRAK-R Pole Hoist Multi Angle Head System



IN-2241

mobile arch support for horizontal access



IN-2087

universal ring adapter



IN-2242

flange adapter

OPTIONAL



INCLUDED

A2557-20

winch bracket



INCLUDED

A2557-072P


handle



INCLUDED

A2557-73

angle bracket

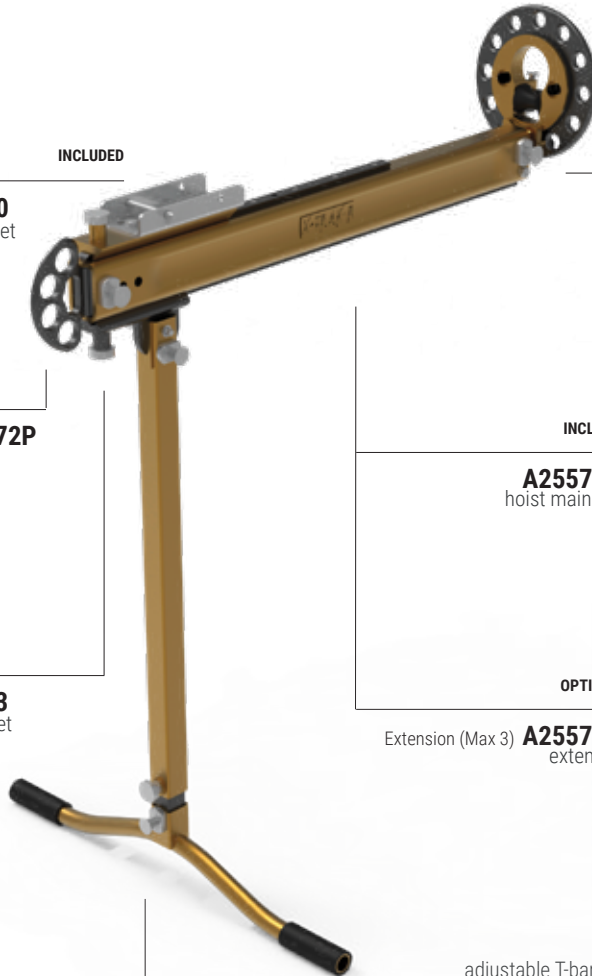

INCLUDED

A2557-76

multi angle head



INCLUDED

A2557-19

hoist main arm



OPTIONAL

Extension (Max 3) **A2557-25**
extension



adjustable T-bar



INCLUDED

A2557-52
telescopic mast